




A GLOBAL LEADER IN PROVIDING
THE MOST INNOVATIVE CUSTOMIZED
FOOD PROCESSING SOLUTIONS

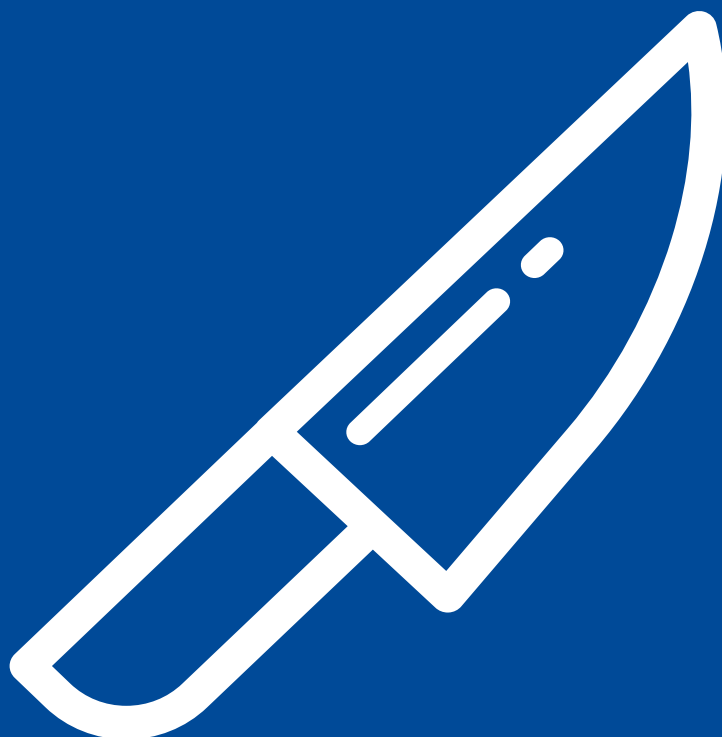

EN - IT

mod. K3-K6

COMPACT TRANSVERSE SLICER
TAGLIERINA TRASVERSALE COMPATTA

K3-K6

COMPACT TRANSVERSE SLICER TAGLIERINA TRASVERSALE COMPATTA



CUTTING
TAGLIO



available for:
SALAD • VEGETABLES • FRUITS

disponibile per:
INSALATA • VERDURE • FRUTTA

Highly hygienic and versatile transverse slicer suitable for slicing or shredding various kinds of fruit and vegetables, and all types of salad. The product (salad, celery, cucumbers, carrots, zucchini,...) can be fed into the machine through the three back sides, where it is subsequently aligned and conveyed to the cutting head by two "V" shape belts. The thickness of the cut can be adjusted by regulating the speed of both the belts and the cutting head. By changing the cutting wheel, it is possible to modify the thickness and the shape of the cut. A unique design discharge chute softly slows down the product to avoid product damage. The machine is available in two sizes. The K3 for products with a maximum diameter of 140 mm and the K6 for a maximum diameter of 190 mm.

The main advantages and features of the machine are:

- High capacity combined with a good cut quality.
- High flexibility and the possibility to adjust the speed of the conveyor and of the cutting wheel.
- Features a wide selection of thickness, and a continuous operation for an uninterrupted production.
- Newly developed materials (i.e. very high-quality blades) improve the operating life of the components and make replacement quick, easy and cost effective.
- Designed for easy sanitizing operation and maintenance.

La taglierina trasversale è un modello versatile adatto al taglio in rondelle o strisce di diversi tipi di frutta, verdura e di tutti le qualità di insalata. Il prodotto (insalata, sedano, cetrioli, carote, zucchini, ecc.) può essere caricato all'interno della macchina dai tre lati posteriori. Il prodotto viene poi allineato e trasportato verso la testa di taglio tramite due nastri a "V". Lo spessore di taglio può essere regolato intervenendo sulla velocità di avanzamento dei nastri e della testa di taglio. E' possibile cambiare lo spessore e la forma del taglio sostituendo la testa di taglio. La macchina è dotata di una tramoggia di speciale concezione che scarica delicatamente il prodotto senza danneggiarlo. Sistema disponibile in due misure, K3 per prodotti con un diametro massimo di 140 mm e K6 per diametro massimo di 190 mm.

I principali vantaggi e caratteristiche della taglierina sono :

- Un'alta capacità coniugata con la qualità del taglio;
- Alta flessibilità e possibilità di regolare la velocità del nastro trasportatore del prodotto e delle teste di taglio;
- Vasta selezione di spessori di taglio con funzionamento in continuo per una produzione ininterrotta;
- I nuovi materiali utilizzati (ad esempio le lame di alta qualità) aumentano la durata dei vari componenti e consentono operazioni di manutenzione rapide, semplici ed economiche;
- Progettata per agevolare le operazioni di pulizia e manutenzione.

	K3	K6
Installed power / Potenza installata	3,3 kW	3,5 kW
Dimensions / Dimensioni	27 ¹¹ / ₆₄ X 95 ³³ / ₆₄ X H.62 ⁶³ / ₆₄ In 690 x 2426 x H.1600 mm	33 ¹⁵ / ₃₂ X 119 ¹⁹ / ₆₄ X H.75 In 850 x 3030 x H.1905 mm